


Kwikdraw-A 17KM/HDM


Features

Key features:-

- 2U 22" short depth design
- Light weight: only 49 lbs / 22 kgs
- Rugged construction for mobility & durability
- Built-in solid bearing slide rails
- Built-in dual stereo speaker (per display)
- 104-key keyboard with touchpad
- 2-year standard warranty

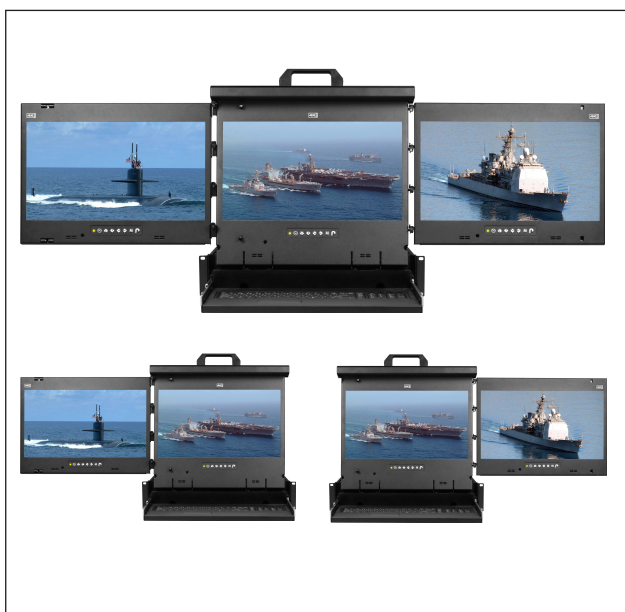

Dimensions

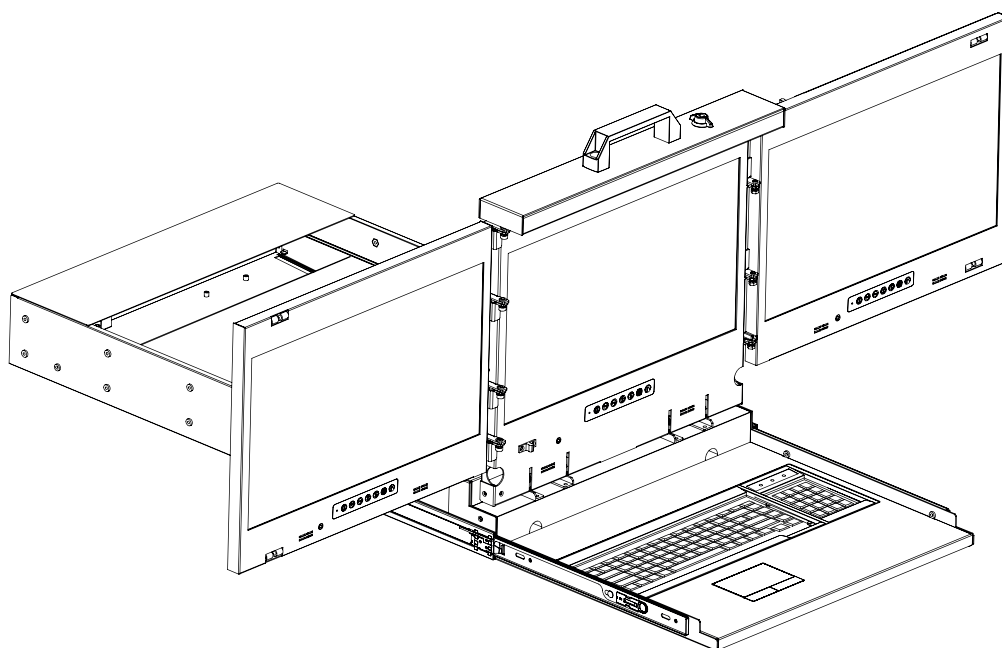

4K 17" Display

3840 x 2160 native resolution / Display port 1.2 video input

1920 x 1080 & 1920 x 1200 resolution support

17KM - 3 Triple display console drawer

17KM - 2L Dual display console drawer (LH mounted)

17KM - 2R Dual display console drawer (RH mounted)

FHD 17" Display

1920 x 1080 native resolution / DVI-D + VGA video input

17HDM - 3 Triple display console drawer

17HDM - 2L Dual display console drawer (LH mounted)

17HDM - 2R Dual display console drawer (RH mounted)


Kwikdraw-A 17KM/HDM

The information is believed to be accurate. However Amplicon Liveline Limited accepts no responsibility for any problems caused by errors and omissions. Specifications are subject to change without notice.

Specifications

LCD Panel		Kwikdraw-A 17KM	Kwikdraw-A 17HDM
Native resolution		3840 x 2160	1920 x 1080
Panel size (diagonal)		17.3”	17.3”
Brightness (cd/m²)		400	400
Contrast ratio (typ.)		1000 : 1	600 : 1
Colors		16.7 M, 8-bit	16.7 M, 8-bit
Viewing angle (L/R/U/D)		89/89/89/89	80/80/60/80
Response time (ms)		Max. 30	40
Dot pitch (mm)		0.0995	0.1989
Display area (mm)		382.12H x 214.94V	381.888H x 214.812V
Surface treatment		Anti-glare	Anti-glare, Hard-coating
Surface hardness		3H	3H
Backlight type		LED	LED
MTBF (hrs)		20,000	50,000
Video		Kwikdraw-A 17KM	Kwikdraw-A 17HDM
Digital	Display port	DP 1.2 / HDCP 1.3	-
	HDMI	HDMI 1.4 / HDCP 1.4 HDMI 2.0 / HDCP 2.2	HDMI 1.3 / HDCP 1.3
	DVI-D	-	DVI-D, TMDS single link
Analog	VGA	-	Analog 0.7Vp-p
Plug & Play	DVI / VGA	-	VESA EDID structure 1.3
Synchronization	VGA	-	Separate, Composite & SOG
Power		Kwikdraw-A 17KM	Kwikdraw-A 17HDM
Input		Auto-sensing 100 to 240VAC, 50 / 60Hz	
Consumption	Screen on	Max. 29W	Max. 25W
	Power Saving	Max. 9W	Max. 4W
	Power Button on	Max. 2W	Max. 1W
Physycal			
Product		mm	441.6 x 550 x 88
		inch	17.4 x 21.7 x 3.5
Packing		mm	585 x 620 x 190
		inch	23 x 24.4 x 7.5
Weight	Net	Triple display	25.4 kg / 55.9 lb
		Dual display	23.4 kg / 51.5 lb
	Gross	Triple display	30.4 kg / 66.9 lb
		Dual display	28.4 kg / 62.5 lb
Chassis color			Dark
Chassis materials			Steel
Compliance			
Safety		CE certified	
Environment		RoHS2 & REACH compliant	
Environment			
Operating temp.		0 to 55°C degree	
Storage temp.		-20 to 60°C degree	
Operating humidity		20~90%, non-condensing	
Storage humidity		5 ~90%, non-condensing	
Operating altitude		16,000 ft	
Non-operating altitude		40,000 ft	
Shock		10G acceleration (11ms duration)	
Vibration		10~300Hz 0.5G RMS random vibration	

Front View

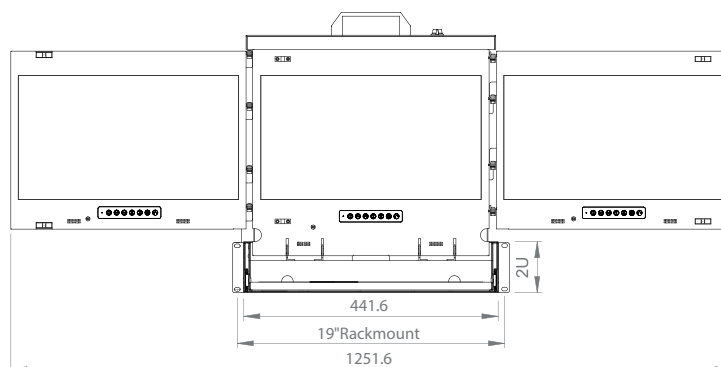

Side View

