



Analog Input

RS-485 Remote I/O Modules



I-87KW Series

I-87018W/I-87018RW

Features

- 8-channel Analog Input
- Current Input, Voltage Input and Thermocouple Input
- High Resolution: 16-bit
- 3000 Vdc Intra-module Isolation
- Open Thermocouple Detection
- 240 Vrms Overvoltage Protection
- 4 kV ESD Protection
- RoHS Compliant
- Wide Operating Temperature Range: -25 to +75°C



Introduction

The I-87018W is an 8-channel analog input module that provides current input and voltage input, as well as thermocouple input.

The I-87018RW is an upgraded version of I-87018W with an extremely high-quality protection mechanism where the overvoltage protection can be as high as 240 Vrms. The input type can be set to either current or voltage, as well as thermocouple. The only difference between the two modules is that the I-87018RW is more suitable for critically harsh environments. Moreover, the newly-added open thermocouple detection feature makes the I-87018RW more attractive than ever. Both the I-87018W and the I-87018RW also features 4 kV ESD protection and 3000 Vdc intra-module isolation.

Applications

- Building Automation
- Factory Automation
- Machine Automation
- Remote Maintenance
- Remote Diagnosis
- Testing Equipment.

System Specifications

Model	I-87018W	I-87018RW
Communication		
Interface	RS-485	
Format	N, 8, 1	
Baud Rate	1200 to 115200 bps	
Protocol	DCON	
Dual Watchdog	Yes, Module (1.6 Seconds), Communication (Programmable)	
LED Indicators/Display		
System LED Indicator	1 LED as Power/Communication Indicator	
I/O LED Indicator	-	16 LEDs as High/Low Alarm Signals
Isolation		
Intra-module Isolation, Field-to-Logic	3000 Vdc	
EMS Protection		
ESD (IEC 61000-4-2)	±4 kV Contact for each Terminal	
	±8 kV Air for Random Point	
Power		
Power Consumption	0.8 W Max.	0.6 W Max.
Mechanical		
Dimensions (W x L x H)	30 mm x 102 mm x 115 mm	
Environment		
Operating Temperature	-25 to +75°C	
Storage Temperature	-40 to +85°C	
Humidity	10 to 95% RH, Non-condensing	

I/O Specifications


Model	I-87018W		I-87018RW
Analog Input			
Channels	8		
Wiring	Differential		
Sensor Type	±15 mV, ±50 mV, ±100 mV, ±500 mV, ±1 V _{DC} , ±2.5 V _{DC}		
	-20 mA ~ +20 mA (Requires Optional External 125 Ω Resistor)		
	Thermocouple (J, K, T, E, R, S, B, N, C, L, M, L _{DIN43710})		
Resolution	16-bit		
Accuracy	±0.1% of FSR		
Sampling Rate	10 Hz (Total)		
-3dB Bandwidth	15.7 Hz		
Zero Drift	±0.5 μV/°C	±10 μV/°C	
Span Drift	±25 ppm/°C		
Common Mode Rejection	150 dB		
Normal Mode Rejection	100 dB		
Input Impedance	>400 kΩ		
Open Wire Detection	-	Yes (Thermocouple)	
Overvoltage Protection	-35 V _{DC} ~ +35 V _{DC}	240 V _{RMS}	

Note: ICPDAS recommends selecting the I-87018RW module for high accurate thermocouple measurement that features automatic cold-junction compensation for each channel to ensure temperature output consistency and stable temperature output in the field..


Thermocouple Type

Type	Temperature Range
J	-210 to +760°C
K	-270 to +1372°C
T	-270 to +400°C
E	-270 to +1000°C
R	0 to +1768°C
S	0 to +1768°C
B	0 to +1820°C
N	-270 to 1300°C
C	0 to 2320°C
L	-200 to +800°C
M	-200 to +100°C
L _{DIN43710}	-200 to +900°C

Internal I/O Structure

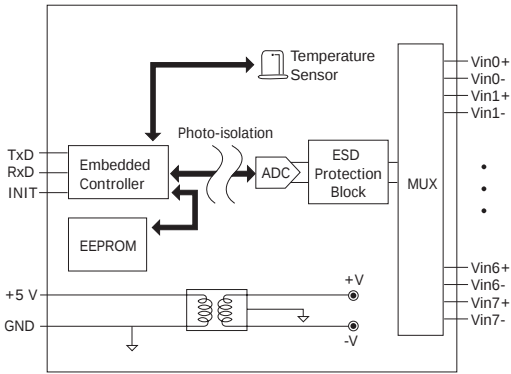


Dimensions (Units: mm)

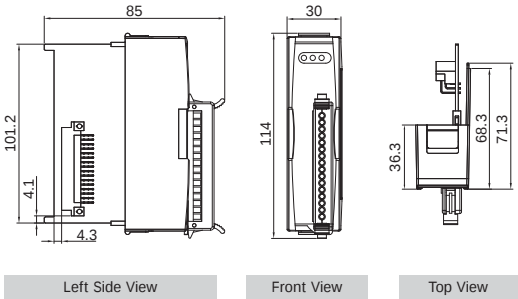


RS-485 Remote I/O Modules

Wire Connections

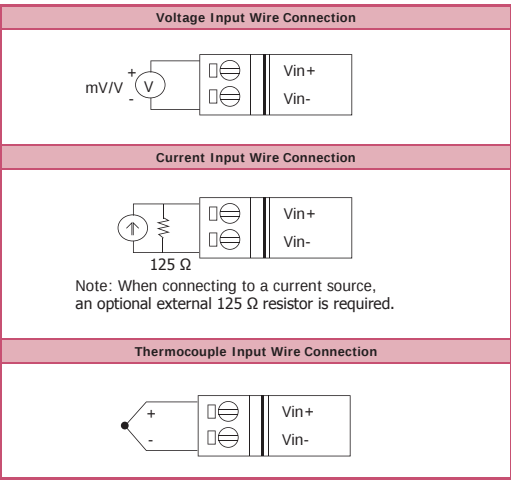

Pin Assignments

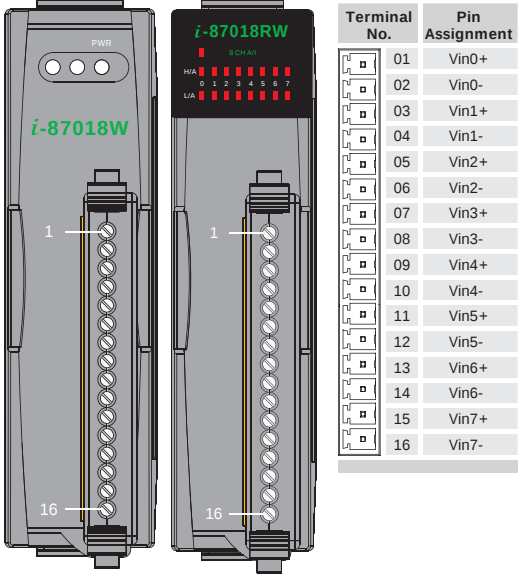

I-87KW Series

Ordering Information

I-87018W-G CR	8-channel Thermocouple Input Module (Gray Cover) (RoHS)
I-87018RW-G CR	8-channel Thermocouple Input Module with High Overvoltage Protection (Gray Cover) (RoHS)

Accessories

125Ω, 0.1% DIP Resistors	Resistor used for Current Type I-87017/I-87018 Series Modules
SG-770 CR	7-channel Differential or 14-channel Single-ended Surge Protector (RoHS)
SG-3000 series	Signal Conditioning Modules for Thermocouple, RTD, DC Voltage, DC Current and Power Input

I-87018W/I-87018RW