


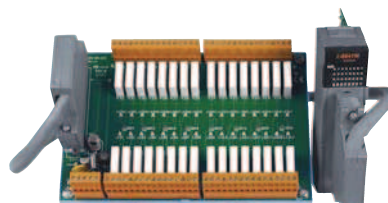


• Selection Guide

Digital Output Modules (Parallel Bus)													Table 5-3-4	
Models	I-8037W	I-8041W	I-8041RW	I-8041AW	I-8056W	I-8057W	I-8057RW	I-8057PW	I-8060W	I-8064W	I-8068W	I-8069W	I-8069RW	
Pictures			Available soon 				Available soon 	Available soon 					Available soon 	
Digital Output														
Channels	16	32			16				6	8	8	8		
Type	Open Collector	Open Collector			Open Collector				Power Relay			PhotoMOS Relay		
Sink /Source (NPN /PNP)	Source	Sink	Sink	Source	Sink				Form C	Form A	Form A x 4 Form C x 4	Form A		
Load Voltage	5~30 Vdc	5~30 Vdc			5~30 Vdc		5~50 Vdc		0.5 A @125 Vac 0.25 A @250 Vac 2A @30 Vdc	5 A @250 Vac 5 A @30 Vdc	Form A : 5 A @250 Vac 5 A @28 Vdc Form C : 5 A (NO) /3A (NC) @30 Vdc 5 A (NO) /3A (NC) @ 277 Vac	60 Vdc /1.0 A		
Max. Load Current	100 mA/channel	100 mA/channel			100 mA/channel		700 mA/channel							
Electrical Endurance	-								5 × 10 ⁵ ops.			No arcing, no bounce and no switching		
Power on Value	-	-	Yes	-	-	-	Yes	-	-	-	-	-	Yes	
Safe Value	-	-	Yes	-	-	-	Yes	-	-	-	-	-	Yes	
System														
Watchdog	-	-	Yes	-	-									
Isolation	3750 Vrms	3750 Vrms			-	3750 Vrms	3750 Vrms	1500 Vrms	2000 Vrms	1500 Vrms	1500 Vrms			
Power Consumption	0.9 W	1.5 W			0.9 W	0.9 W	1.5 W	1 W	1.1 W	2.5 W	0.6 W			
Connector	Terminal Block	D-Sub 37			Terminal Block									
Optional Accessories	-	DN-8K32R, DN-37-381-A		DN-37-381-A	-									
  I/O module with DN-8K32R I/O module with DN-37-381-A														