


Ventrix 540/41 PICMG 1.3




Features

- Intel® i5/i7 Processor with Hyper-threading and TurboBoost
- Supports Intel® AMT 7.0, RAID 0,1,5,10, TPM
- 3 year warranty, first year onsite (UK ONLY)
- Constructed from roadmapped industrial components
- Designed for mission critical 24/7 applications
- Assembled and tested within a lean manufacturing environment under ISO 9001


Dimensions

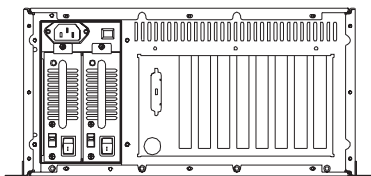


Rear View

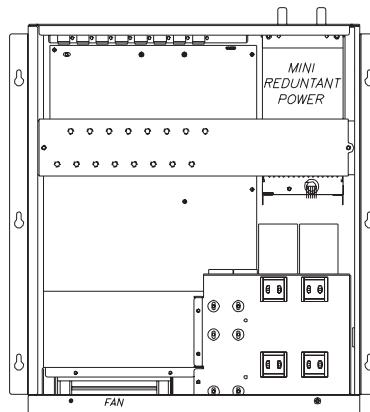

Top View

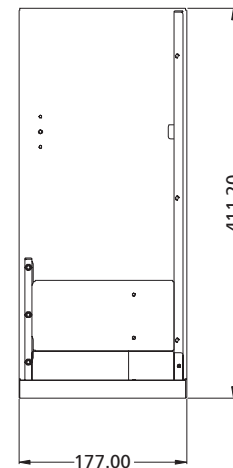

Side View

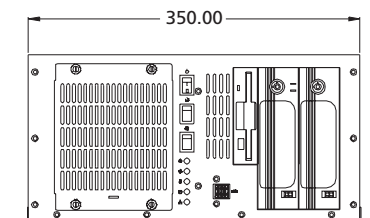

Front View

Ventrix 540/41 PICMG 1.3

Specifications

The information is believed to be accurate. However Amplicon Liveline Limited accepts no responsibility for any problems caused by errors and omissions. Specifications are subject to change without notice.

Hardware specification	Processors incorporated into each model: Ventrix 540-E1.6 – Intel® Core™ i5-2400 3.1 GHz, 6M Cache Ventrix 541-E1.6 – Intel® Core™ i7-2600 3.4 GHz, 8M Cache Chipset: Intel® Q67 Express Chipset Main memory: 2GB DDR3 1066/1333MHz dual channel (max 16GB*) Video: Integrated Intel® HD Graphics Display Resolution: Resolutions up to 2048 x 1536 @ 75 Hz LAN: 2 ports at 10/100/1000Mbps, support for WoL, PXE Boot ROM, AMT 7.0 with Intel® 82579LM, 2 nd port Intel® 82574L Watchdog Timer: 1-255 sec or 1-255 min TPM: Infineon SLB 9635 TT 1.2 *Usable memory capacity may be limited by the operating system	Environmental operational	Acoustic noise: 50dBA sound pressure at 22°C (typical) Temperature: 5 to 45°C (tested for extended operation up to 50°C) Humidity: 5 to 90% at 25°C non-condensing Please contact us to discuss extended or harsher environmental specifications
BIOS	BIOS AMIBIOS 64Mb SPI BIOS	Environmental storage	Temperature: -20 to 65°C Humidity: 5 to 90% at 25°C non-condensing
Storage	250GB HDD 7200rpm DVDRW Total drive capacity: 2 x 5.25", 1 x 3.5" HDD, 1 x 3.5" FDD / HDD We can provide storage and backup solutions for any application	Electromagnetic compatibility (EMC)	EN55022 Class A EN55024 Industrial severity (where applicable) Electrostatic discharge immunity test (EN61000-4-2) ±4kV Contact, applied to enclosure port ±8kV Air, applied to enclosure port ±4kV Indirect, applied to coupling plane Radiated, radio-frequency, electromagnetic field immunity test (EN61000-4-3) 80-1000MHz, 10 V/m (RMS, no modulation) 80% Modulation with 1kHz Sine wave Electrical fast transient/burst immunity test (EN61000-4-4) Power port AC, inc. protective earth Severity ±2kV Surge Immunity test (EN61000-4-5) Power port AC Severity ±2kV applied line to line Severity ±2kV applied line to earth Immunity to conducted disturbances induced by radio frequency fields (EN61000-4-6) Power port AC, inc. protective earth via CDN M3 0.15-80MHz, 10 V/m (no modulation) 80% Modulation with 1kHz Sine wave, applied via CDN type M3 Voltage dips, short interrupts and voltages variations immunity tests (EN61000-4-11) Power port AC >95% Reduction, 0.5 Periods >30% Reduction, 25 Periods >95% Reduction, 250 Periods Voltage dips, short interrupts and voltages variations immunity tests (EN61000-6-2) Power port AC >30% Reduction, 0.5 Periods >60% Reduction, 25 Periods >100% Reduction, 250 Periods Limits for harmonic current measurement (EN 61000-3-2), Product Class D Limitation of voltage changes, voltage fluctuations and flicker (EN 61000-3-3) Amplicon own a fully equipped EMC facility and can provide many additional tests to meet your requirements.
System expansion	5 PCI (1 x full length, 4 x 180mm) 1 x PCIe X16 (Graphics only available on the 530 model only) Additional slots can be made available by reducing I/O ports such as serial, parallel and USB.	Safety	Safety of information technology equipment (EN 60950) CE Marked
System architecture	Full-sized SBC with PCI / PCIe golden finger PICMG 1.3 Compliant PCI V2.2 Compliant	Electrical ratings	Voltage: 90 – 264 VAC full range Frequency: 47–63Hz Input current: 8.0 / 4.0A for 115 / 230 VAC Inrush current: 65A / 125A max Typical operational current: : 0.5 –1A (base system) PSU maximum secondary loading: 460W Typical Power 150W (unexpanded) Active PFC EMI noise filter Over power / voltage / current protection Short circuit protection Higher rated and DC power supplies options are available. We recommend that you discuss your power requirements before placing your order
Supported OS (Operating System)	Windows XP FeS, Windows 7 32/64 Bit, Windows Server 2008, and Linux If your desired operating system is not listed, or you wish to check support for a specific version of Linux, please contact us.	Reliability	System MTBF: >25,000 hrs (we can provide information for specific configurations) Four hour burn-in diagnostic run on every system
Internal interfaces	Serial ATA: 2x SATA 6 Gb/s ports, 4x SATA 3 Gb/s ports, supports RAID 0/1/5/10 USB: 8 x USB 2.0 ports KB/MS 1x internal pin header for PS/2 keyboard/mouse* Serial Ports: 5x RS-232, 1x RS-232/422/485* *Available via rear breakout		
LEDs and switches	Power (PC ON) LED Hard disk access LED x 2 Environmental temperature warning LED System fan monitor LED x 2 Environmental monitoring buzzer reset Front: ATX system control switch, system reset		
External interfaces	Front USB: 2 ports Front keyboard: Mini-DIN for (keyboard only) Rear USB: 2 x USB 3.0 ports on faceplate Serial: COM 1–6 available via brackets* (9 pin D-Type) VGA: DB-15 connector x 1 LAN: RJ45 Ethernet x 2 *Please discuss your port configuration requirements		
Mechanical	Design: Desktop or wall mount Construction: Heavy duty cold rolled electroplated steel Colour: Black (custom colours available for large orders) Dimensions: 350(W) x 177(H) x 411(D) mm (13.8" x 7.0" x 16.2") Packaging size: 490(W) x 324(H) x 558(D) mm (19.3" x 12.8" x 22.0") Total drive capacity: 2 x 5.25", 1 x 3.5" HDD, 1 x 3.5" floppy disk drive Cooling: 1 x 120mm fan, 90 CFM Air filter: Removable (washable) Gross weight: Approximately 17kg		

Model	PCIe slots	PCI slots	Processor
Ventrix 540-E1.6	1	4	Intel Core i5 2400, 3.1GHz
Ventrix 541-E1.6	0	4	Intel Core i5 2600, 3.4GHz