

# Impact-R 2100




## Features

The Impact-R 2100 series computers are powered by Intel® based commercial motherboards, delivering a compact and flexible computer platform.

- Intel® Comet Lake CPU architecture
- DDR4 Memory up to 128GB
- Supports 3 native displays simultaneously

Our production processes are controlled under ISO 9001 and every system undergoes a full diagnostic burn-in prior to shipment.

## Dimensions

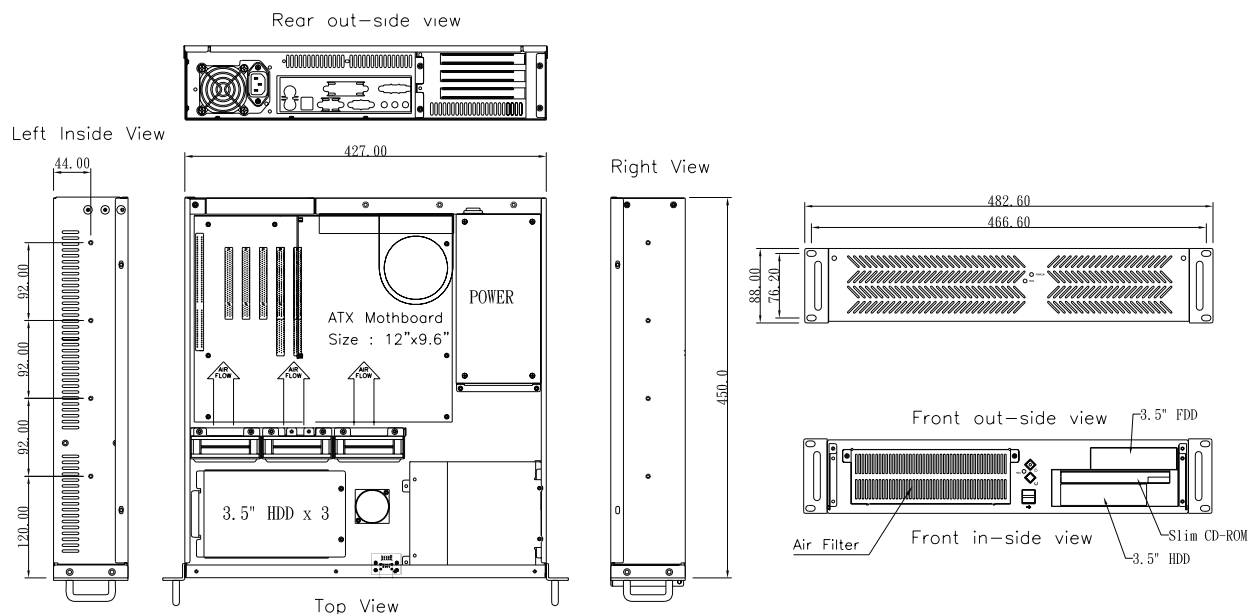

# Impact-R 2100

The information is believed to be accurate. However Amplicon Liveline Limited accepts no responsibility for any problems caused by errors and omissions. Specifications are subject to change without notice.

## Specifications

Hardware Specification	CPU: Intel® LGA1200 10th Generation Core™ i9/i7/i5/i3 and Xeon Chipset: Intel® W480E Memory: 4 x DIMM - max 128GB DDR4 2933MHz non-ECCLAN: Intel® I211AT/I219LM GbE	System Architecture	Intel® Based Industrial motherboard
BIOS	Insyde	Supported O/S	Windows 10/Linux
Display	1 x VGA, resolution up to 1920x1200 @ 60Hz 1 x DP++, resolution up to 4096x2160 @ 60Hz 1 x HDMI 1.4b, resolution up to 4096x2160 @ 24Hz	Mechanical	Design: EIA RS-310C 19" Rackmount Standard Construction: Heavy Duty Cold Rolled Electroplated Steel Colour: Black (custom colours available for large orders) Dimensions: 483(W) x 88(H) x 450(D)mm (19.0" x 3.5" x 17.7") Package Size: 615(W) x 224(H) x 600(D)mm (24.2" x 8.8" x 23.6") Total drive capacity: 1 x Slim 5.25" external, 1 x 3.5" external, 4 x 3.5" internal or 1 x 5.25" external, 1 x 3.5" external, 3 x 3.5" internal Cooling: 3 x 80mm ball bearing fans (42.5 CFM each) Air filter: removable (washable) Gross Weight: approximately 17 kg
Storage	Total Drive capacity: 4 x 3.5" HDD & 1 x 5.25" bay, or 5 x 3.5" HDD & 1 x Slim DVD RAID: 0, 1, 5, 10 Dual M.2 also available	Environmental operation	Acoustic noise: Approximately 49dB(A) sound pressure at 23°C (typical) Temperature: 5 to 45°C (tested for extended operation up to 50°C) Humidity: 5 to 90% at 25°C non-condensing
System Expansion	2 x PCIe x16 (Gen 3) (1 x16 signal or 2 x8 signal) Low Profile 3 x PCIe x4 (Gen 3) (2 x4 signal and 1 x1 signal) Low Profile 2 x PCI Low Profile 2 x M.2 M key PCIe 3.0 x 4 NVME	Environmental storage	Temperature: -20 to 65°C Humidity: 5 to 90% at 25°C non-condensing
External Interfaces	Front: 2 x USB 2.0/1.1 On/Off Switch, Reset Pwr/HDD LEDs Rear: 2 x GbE (RJ-45) 1 x RS-232/422/485 (RS-232 w/ power) (DB-9) 2 x USB 3.2 Gen2, 2 x USB 3.2 Gen1, 4 x USB 2.0 1 x VGA, 1 x DP++, 1 x HDMI 1 x Line-out, 1 x Mic-in,	Reliability	System MTBF: Critical components failure >45,000 hrs @ 25°C (we can provide information for specific configurations). Full burn-in diagnostic run on every system
		Certifications	CE/UKCA