



Ethernet I/O Modules



Power Relay Output and DI Module

Features

- PoE and Regular Ethernet Options
- Built-In Web Server
- Web HMI
- Modbus/TCP, Modbus/UDP Protocol
- Communication Security
- Dual Watchdog
- Operating Temperature: -25 ~ +75 °C
- I/O Pair Connection
- Built-In I/O
 - DI/Counter: 6 Channels
 - Power Relay: 6 Channels



Introduction

The ET-7000/PET-7000, a web-based Ethernet I/O module, features a built-in web server which allows configuration, I/O monitoring and I/O control by simply using a regular web browser. Remote control is as easy as surfing the Internet.

Besides, with the web HMI function, no more programming or HTML skills are required; creating dynamic and attractive web pages for I/O monitoring and I/O control would be fun to engineers ever after. The ET-7000/PET-7000 offers easy and safe access for users from anytime and anywhere! In addition, the ET-7000/PET-7000 also supports Modbus/TCP protocol that makes perfect integration to SCADA software.

Furthermore, PET-7000 features "PoE" that not only data but also power is carried through an Ethernet cable. This feature makes installation of PET-7000 a piece of cake. Imagine that no more unnecessary wires, only an Ethernet cable takes care of everything in the field.

Applications

Building Automation, Factory Automation, Machine Automation, Remote Maintenance, Remote diagnosis, Testing Equipment.


System Specifications

Models	ET-7060	PET-7060
Software		
Built-In Web Server	Yes	
Web HMI	Yes	
I/O Pair Connection	Yes	
Communication		
Ethernet Port	10/100 Base-TX with Auto MDI/MDI-X	
Protocol	Modbus/TCP, Modbus/UDP	
Security	ID, Password and IP Filter	
Dual Watchdog	Yes, Module (0.8 second), Communication (Programmable)	
LED Indicators		
L1 (System Running)	Yes	
L2 (Ethernet Link/Act)	Yes	
L3 (Ethernet 10/100 M Speed)	Yes	
PoE Power	-	Yes
2 Way Isolaiton		
Ethernet	1500 V _{oc}	-
I/O	3000 V _{rms}	3000 V _{rms}
EMS Protection		
ESD (IEC 61000-4-2)	4 kV Contact for each terminal	
EFT (IEC 61000-4-4)	+/-2 kV for Power	
Power Requirements		
Reverse Polarity Protectionn	Yes	
Powered from terminal block	Yes, 10 ~ 30 V _{oc}	Yes, 12 ~ 48 V _{oc}
Powered from PoE	-	Yes, IEEE 802.3af, Class1
Consumption	2.9 W	4.8 W
Mechanical		
Dimensions (W x L x D)	72 mm x 123 mm x 35 mm	
Installation	DIN-Rail or Wall mounting	
Environment		
Operating Temperature	-25 °C ~ +75 °C	
Storage Temperature	-30 °C ~ +80 °C	
Humidity	10 ~ 90% RH, non-condensing	

I/O Specifications

Digital Input/Counter	
Input Channels	6
Type	Wet Contact (Sink, Source)
On Voltage Level	+10 Vdc ~ +50 Vdc
Off Voltage Level	+4 Vdc max.
Input Impedance	10 kΩ
Counters	Max. Count
	4,294,967,285 (32 bits)
	Max. Input Frequency
	500 Hz
	Min. Pulse Width
	1 ms
Overvoltage Protection	+70 Vdc
Power Relay	
Output Channels	6
Type	Power Relay, Form A (SPST N.O.)
Operating Voltage Range	250 Vac/30 Vdc
Max. Load Current	5.0A/channel at 25 °C
Operate Time	6 ms (Typical)
Release Time	3 ms (Typical)
Electrical Life (Resistive Load)	VDE
	5A 250 Vac 30,000 ops (10 ops/minute) at 75 °C
	5A 30 Vdc 70,000 ops (10 ops/minute) at 75 °C
	UL
	5A 250 Vac/30 Vdc 6,000 ops.
	3A 250 Vac/30 Vdc 100,000 ops.
Mechanical Life	20,000,000 ops. at no load (300 ops./minute)
Power On Value	Yes, Programmable
Safe Value	Yes, Programmable

Pin Assignment

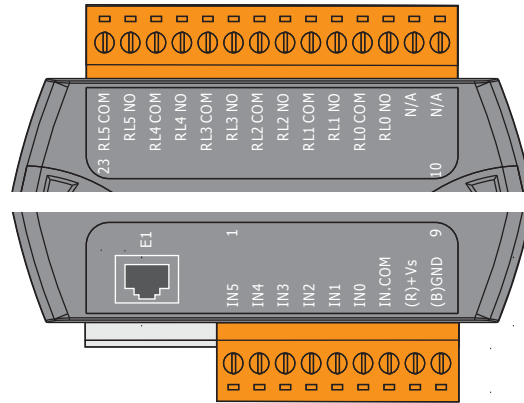

Wire Connection

Digital Input/Counter	Readback as 1 +10 ~ +50 Vdc	Readback as 0 OPEN or <4 Vdc
Sink		
Source		
Power Relay	ON State Readback as 1	OFF State Readback as 0
Relay Output		

Ordering Information

ET-7060 CR	6-channel Power Relay Output and 6-channel Isolation Digital Input Module with 32-bit Counters (RoHS)
PET-7060 CR	6-channel Power Relay Output and 6-channel Isolation Digital Input Module with 32-bit Counters PoE Module (RoHS)

Accessories

NS-205 CR	Unmanaged 5-port Industrial Ethernet Switch; requires 24 Vdc Input (RoHS)
NS-205PSE CR	Unmanaged Ethernet switch with 4-PoE and 1 RJ45 uplink; requires 48 Vdc Input (RoHS)
NS-205PSE-24V CR	Unmanaged Ethernet switch with 4-PoE and 1 RJ45 uplink; requires 24 Vdc Input (RoHS)
MDR-20-24 CR	24V/1A, 24 W Power Supply with DIN-Rail Mounting (RoHS)
DIN-KA52F-48 CR	48V/0.52A, 25 W Power Supply with DIN-Rail Mounting (RoHS)