Senses 1115



Features


The Senses 1115 is a fanless Industrial Panel PC utilising the Intel's superb Tiger lake processor and provides a 15.6" TFT LCD touchscreen and an IP65 rated front panel.

Features:

- Projective Capacitive front panel (10 point)
- P65 Front panel
- VESA/Wall/Panel mountable
- Optional Wi-Fi

Each Industrial Panel PC comes with a 2 year warranty.

Dimensions

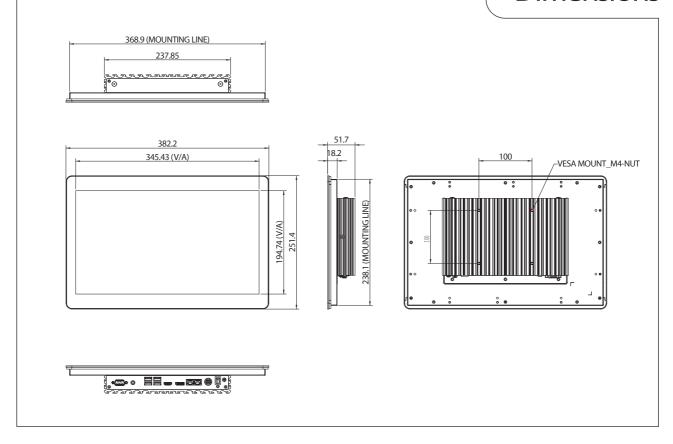

AmpliconFrance.com

Tél: 04 37 28 30 34

PC Industriels et Instrumentation pour l'industrie



Senses 1115

The information is believed to be accurate. However Amplicon Liveline Limited accepts no responsibility for any problems caused by errors and omissions. Specifications are subject to change without notion

Specifications

| Hardware specification | Onboard 11th Generation Intel® Core™ i3-1115G4E processor, dual core, 2.2 GHz base frequency, 6M cache (formerly Tiger Lak-UP3) Intel® UHD graphics 630 on i3 processor Onboard 11th Generation Intel® Core™ i5-1145G7E processor, dual core, 1.5 GHz base frequency, 8M cache Intel® lib® We graphics on i5 processor (by request) Main Memory: 4GB DDR4 2133MHz (max 32GB) Video: Intel® UHD graphics 630 on i3 processor Intel® lis® Xe graphics on i5 processor | Mechanical | Shock - IEC 60068-2-27 - 50g peak acceleration (11 msec. duration) System: 382.2mm x 251.4mm x 51.7mm System weight: 3.0 kg Package: 476mm x 355mm x 206mm Package weight: 4.7kg |
|---------------------------|--|---------------|--|
| | LAN: Dual GbE Intel Ethernet controllers (Optional WLAN) | Environmental | Temperature: Operating: 0°C to 50°C Storage: -20°C to 60°C |
| BIOS | AMI | | Operating humidity: |
| Storage | 1 x M.2 2280 Key M SSD, support PCIe x4 | | 10% to 90% relative humidity, non-condensing limits to be at 90% |
| Display | Display type: 15.6" TFT LCD Resolution(16:09): 1920 x 1080 Brightness (cd/m): 450nits | Powersupply | 1 x External 60W AC/DC power adapter with lock (power adapter is included in accessory) Input: 100VAC to 240VAC |
| System expansion | 1 x M.2 2230 Key E, support optional Wi-Fi modules | | Output: DC+12VDC |
| Supported OS | Windows 10 IoT 64-bit | Certification | CE/UKCA |
| (Operating System) | Linux (If your desired operating system is not listed, please contact us.) | | |
| External interfaces | 2 x Antenna hole 1 x RS232/422/485 2 x R.145 Intel® (3gabit LAN port 1 x HDM12.0 4 x USB 3.0 1 x Line out 1 x 12VDC jack | | |
| LEDs & switches (bottom) | LED for power on/off Power switch | | |



Tél: 04 37 28 30 34