



Analog Input

RS-485 Remote I/O Modules



Introduction

The I-87017RCW is an 8-channel current input module that is specifically designed to measure current only. Its user-friendly design saves both time and effort when measuring a current thanks to a built-in resistor, meaning that current can now be measured directly. The I-87017RCW is much more suitable for critically harsh environments since it also has 4 kV ESD protection and +/-200 Vdc common voltage as current input protection, and also features 3000 Vdc intra-module isolation together with open wire detection for +4 to +20 mA input. The sampling rate for the I-87017RCW is adjustable, meaning that either fast mode or normal mode can be selected.

System Specifications

Communication	
Interface	RS-485
Format	N, 8, 1
Baud Rate	1200 to 115200 bps
Protocol	DCON
Dual Watchdog	Yes, Module (1.6 Seconds), Communication (Programmable)
LED Indicators/Display	
System LED Indicators	Yes, 1 as Power/Communication Indicator
I/O LED Indicators	16 as High/Low Alarm Signals
Isolation	
Intra-module Isolation, Field-to-Logic	3000 Vdc
EMS Protection	
ESD (IEC 61000-4-2)	±4 kV Contact for each Terminal ±8 kV Air for Random Point
Power	
Power Consumption	1.3 W Max.
Mechanical	
Dimensions (L x W x H)	115 mm x 30 mm x 102 mm
Environment	
Operating Temperature	-25 to +75°C
Storage Temperature	-40 to +85°C
Humidity	10 to 95% RH, Non-condensing

Features

- 8 Current Input Channels
- ±200 Vdc Common Voltage Protection
- Supports both Fast and Normal Mode Sampling Rates
- Overcurrent Protection
- Built-in Resistor to simplify Current Measurement
- Open Wire Detection for +4 to +20 mA input
- 3000 Vdc Intra-module Isolation
- 4 kV ESD Protection
- RoHS Compliant
- Wide Operating Temperature Range: -25 to +75°C



Applications

- Current Measurement
- Voltage Measurement
- Environment Monitoring
- Tunnel Monitoring
- Building Monitoring


I/O Specifications

Analog Input		
Channels		8
Wiring		Differential
Range		0 ~ +20 mA, +4 ~ +20 mA, -20 mA ~ +20 mA (No External Resistor Required)
Resolution		16-bit
Accuracy	Normal Mode	±0.1% of FSR
	Fast Mode	±0.5% of FSR
Sampling Rate	Normal Mode	10 Hz (Total)
	Fast Mode	60 Hz (Total)
-3dB Bandwidth		15.7 Hz
Zero Drift		±20 µV/°C
Span Drift		±25 ppm/°C
Common Mode Rejection		86 dB
Normal Mode Rejection		100 dB
Input Impedance		125 Ω
Common Voltage Protection		-200 Vdc ~ +200 Vdc
Open Wire Detection		Yes, for +4 ~ +20 mA
Overvoltage Protection		-
Overcurrent Protection		Yes, 50 mA at 110 Vdc


I-87KW Series

I-87017RCW

Internal I/O Structure

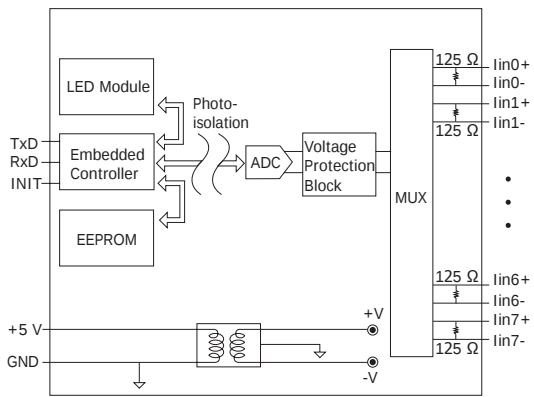

Dimensions (Units: mm)

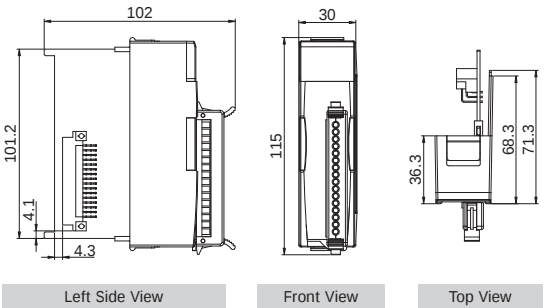

RS-485 Remote I/O Modules

Wire Connections

Current Input

Transmitter Input

2-wire	
3-wire	
4-wire	

Type	0D	07	1A
Signal	±20 mA	+4 ~ +20 mA	0 ~ +20 mA

Pin Assignments

Terminal No.	Pin Assignment
01	lin0+
02	lin0-
03	lin1+
04	lin1-
05	lin2+
06	lin2-
07	lin3+
08	lin3-
09	lin4+
10	lin4-
11	lin5+
12	lin5-
13	lin6+
14	lin6-
15	lin7+
16	lin7-

I-87KW Series

Ordering Information

I-87017RCW-G CR	8-channel Current Input Module with Overcurrent Protection using the DCON Protocol (Gray Cover) (RoHS)
-----------------	--

Accessories

DN-843V-600V CR	3-channel 600 V Voltage Attenuator (RoHS)	DN-843I-CT-50 CR	3-channel 50 A Current Transformer (RoHS)
DN-848VI-80V CR	8-channel 80 V Voltage Attenuator (RoHS)	SG-770 CR	7-channel Differential or 14-channel Single-ended Surge Protector (RoHS)
DN-848VI-150V CR	8-channel 150 V Voltage Attenuator (RoHS)	SG-3000 series	Signal Conditioning Modules for Thermocouple, RTD, DC Voltage, DC Current and Power Input Transformers
DN-843I-CT-1 CR	3-channel 1 A Current Transformer (RoHS)		

I-87017RCW